


# Gewindestifte mit Innensechskant und Spitze

Hexagon socket set screws with cone point

ISO 4027

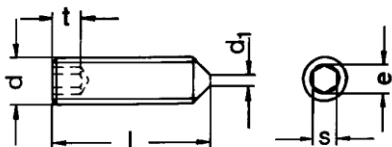

A 4

d <sub>1</sub> max.	-	-	-	1,5	2	2,5	3	4	5
t min.	1,2	1,5	2	2	3	4	4,5	6,4	8
e	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
s	1,5	2	2,5	3	4	5	6	8	10

d	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
---	-----	-----	-----	-----	-----	------	------	------	------

l (mm)	M 3	M 4	M 5	M 6	M 8	M 10	M 12	M 16	M 20
2									
3	30,10								
4	26,30								
5	25,70	26,60	27,80						
6	26,30	27,00	28,00	35,60					
8	27,30	27,90	29,10	36,80	47,50				
10	29,90	30,40	30,60	37,80	47,50	76,10			
12	34,80	31,90	34,80	39,70	51,00	81,80	198,00		
16		37,80	43,00	47,20	61,30	88,40	200,00	378,00	
20		40,20	49,00	54,70	74,10	110,00	207,00	426,00	
25		49,00	53,60	60,30	83,30	123,00	231,00	509,00	
30			57,70	68,50	97,60	135,00	258,00	533,00	963,00
35				74,60	106,00	152,00	284,00	540,00	981,00
40				80,20	118,00	163,00	312,00	592,00	1036,00
45					131,00	179,00	352,00	638,00	1062,00
50					138,00	193,00	384,00	690,00	1079,00
60							394,00	736,00	1104,00
70							541,00	787,00	1196,00
80								838,00	1273,00
90								899,00	
100								956,00	
	500	500	500	500	200	100	100	25	25
		l ≥ 25	l ≥ 25	l ≥ 25			l ≥ 40		
		200	200	200			50		

Preise/Prices...100 Stück/pcs.

Bestellbeispiel/example for ordering: DIN 914 - A 4 - M 10 x 40

Siehe auch DIN 553 bzw. ISO 7434.

See also DIN 553 resp. ISO 7434.